

T744



T744K #1+(7K

Type: Family size dryer Line Series™ Classic, ADA Compliant
Color: White

PROGRAMS

Auto heavy, Auto normal, Auto delicate and Auto iron dry

OPTIONS

Anti-Crease, Low temperature

CAPACITY

UltraCare – family size capacity/3.9 cu.ft.

TECHNOLOGY

SensiDry-sensor, Butterfly™ drying system, Double lint filter and Cleanable fan. Easy access condensor chamber

CONSTRUCTION

Stainless Steel drum, Three ball bearing suspension, Heavy duty life-tested motor.

SIMPLICITY/COMFORT

Line Series™ Classic control with LED display, Program memory, Vents up to 60' & 3-way venting, Stacking kit included and Reversible door

SAFETY

Certified on UL 2158/CSA C22.2 112 Electric Dryer Fire Containment Standard



ASKO

PLANNING & DESIGN: FAMILY-SIZE DRYER – LINE SERIES™

T744 Vented Dryers

Unit Dimensions

	US	METRIC
HEIGHT:	33 3/8" – 34 1/2"	851 – 876 mm
WIDTH:	23 1/2"	597 mm
DEPTH: T744	23 7/8" *	606 mm
DEPTH WITH T744 DOOR OPEN	46 1/8"	1172 mm
WEIGHT:	86 lbs	39 kg


Technical Data

Supply voltage	Single-phase 208-240V, 60 Hz
Max Wattage	3000 W

NOTE: When on a separate outlet, use 220 V, 20 Amp single-phase circuit. When an ASKO washer is connected, use 220 V, 30 Amp single-phase circuit.

*Includes control knob.

**Does not include accessory door panel.

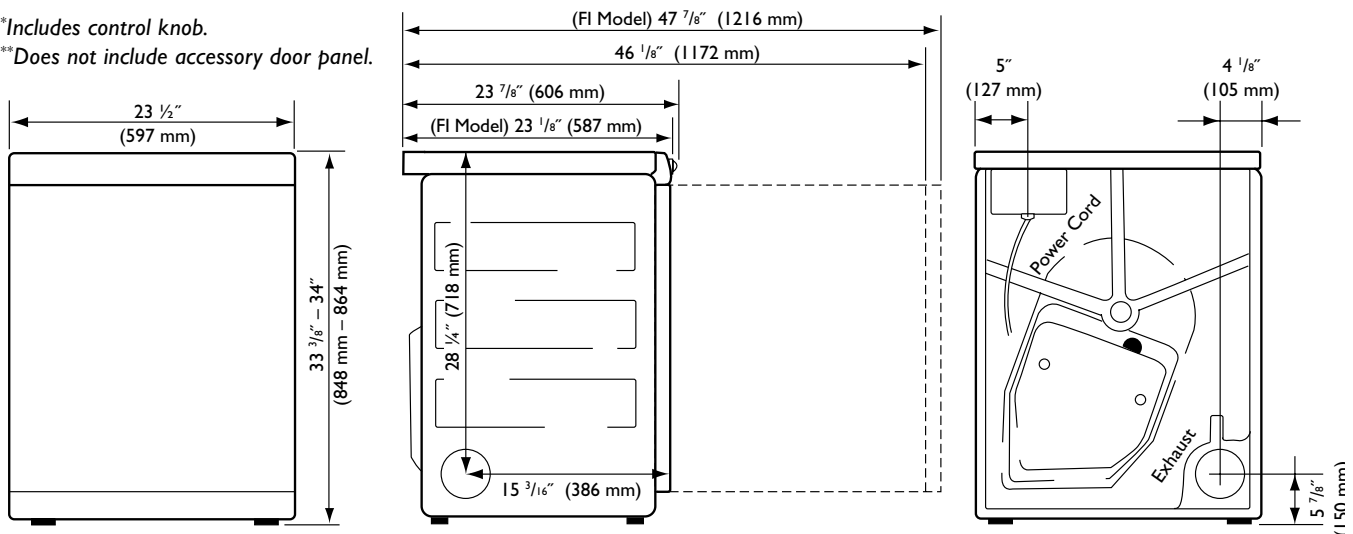

The door hinges on ASKO dryers are shipped left-hinged, but they are reversible. See the ASKO Dryer Use and Care Guide for more information.

When placing the dryer next to a wall or cabinet, be sure to leave 1/4" (6 mm) of space between the dryer and the wall or cabinet.

See page 35-36 for stacked washer/dryer dimensions.

See pages 38-40 for cutout dimensions for closet and under-cabinet installations.

NOTE: Power cord not supplied with unit.

Specifications are subject to change without notice. See installation instructions for additional details.

Venting Requirements


WARNING! To reduce the risk of fire, vented dryers must be exhausted OUTDOORS or the equivalent.

Never cover the end of the dryer stub or vent hose with anything to catch lint, except for a UL-approved vent basket.

The exhaust hose should be run with as few bends as possible to the point of discharge. Maximum duct length of 60' (1829 cm) is allowed. Make any bends as gentle as possible. A maximum of four 90° bends may be fitted in the hose, otherwise the performance of the dryer will be impeded. Subtract 4' (122 cm) of duct for each 90° elbow. If more than 20' (210 cm) of duct is needed, we recommend increasing the diameter of the duct to 6" or 8" (152 mm or 203 mm).

If the exhaust hose is taken to a wall outlet, a ventilation grill should be fitted to prevent reverse flow of cold air. Fit the ventilation grill to the outside or inside of the wall.

This appliance should not be exhausted into a chimney, a wall, a ceiling, or a concealed space of a building. Only a metal ventilation grill should be used.

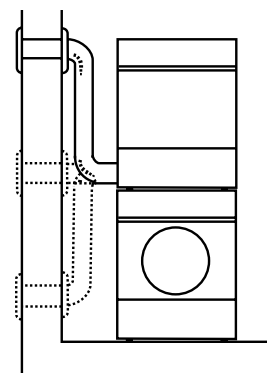

Installation Examples

Subtract 4 feet (122 cm) for every 90° elbow.

PLANNING & DESIGN: FAMILY-SIZE LAUNDRY STACKED CABINET OR CLOSET INSTALLATIONS

ASKO's front controls make it possible to install the washers and dryers under a cabinet or in a closet. Make sure there is a 1/4" (6 mm) minimum clearance between units and cabinet or wall. To ensure proper ventilation, we recommend louvered doors, particularly for condenser dryers.

Every ASKO family-size washer is delivered ready-fitted with a plug and is intended for connection to an ASKO family-size dryer which is equipped with a matching receptacle. When an ASKO family-size washer is connected to the ASKO family-size dryer, use 220 V, 30 Amp single-phase circuit. When the ASKO family-size dryer is on a separate outlet, use 220 V, 20 Amp single-phase circuit. If the ASKO family-size washer is used separately or with another dryer, it must be on a separate 220 V, 20 Amp single-phase circuit.

Cutout Dimensions


	US	METRIC
HEIGHT:	67 1/2" – 69 1/2"	1715 – 1765 mm
HEIGHT w/HH:*	72 3/4" – 74 3/4"	1845 – 1870 mm
WIDTH:	24"	610 mm
DEPTH:	25"	635 mm

*Height with 6" (152 mm) HiddenHelper™ installed

Vented Dryer Opening

T794FI, T784 and T754 family-size dryers can be vented from the rear, left or right side. The cabinet cutout illustrated below gives the dimensions for a rear exhaust.

See page 33 for venting requirements.

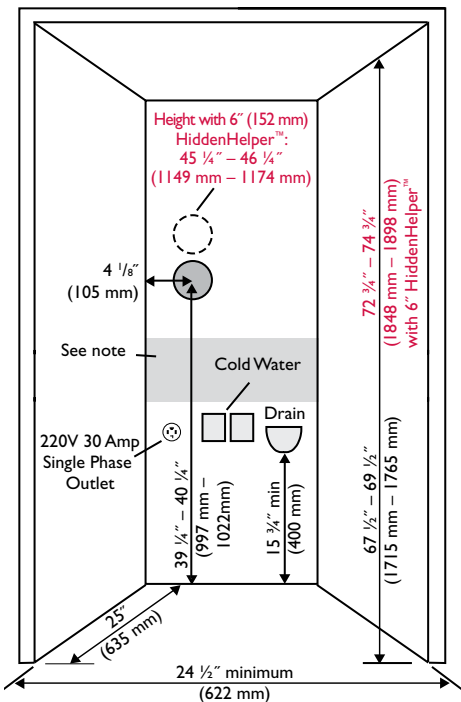


Height does not include the height of any vent duct materials.

Condenser Dryer Opening

ASKO condenser dryers must be installed to continuously drain through a hose attached to the rear of the machine.

To ensure proper drainage, the drain must not be higher than 40" (1016 mm) above the bottom of the dryer.

See page 34 for condensation drain requirements.

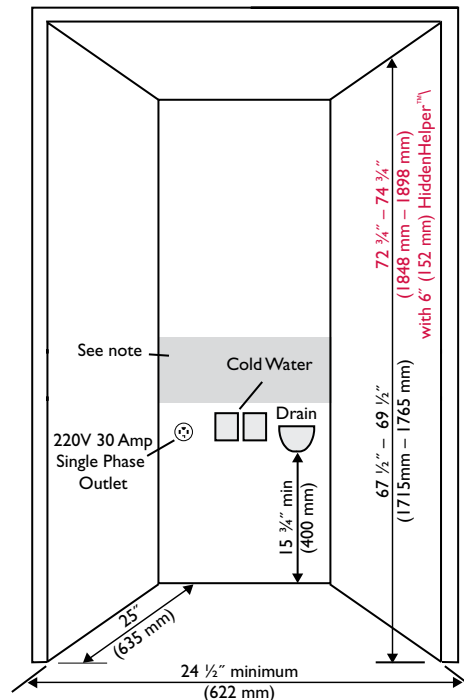

Height does not include the height of any vent duct materials.

NOTE: To avoid crimping the electrical and water connections, do not install the hookups between the area of 26" (660 mm) to 35" (889 mm) from the floor (as indicated by shaded area in illustrations above).

For stacked installations, we recommend a 6' (1829 mm) cord.

Never cover the end of the dryer stub or vent hose with anything to catch lint, except for a UL-approved vent bucket.

When HiddenHelper™ is specified, see pages 46-47. The following 6" (152 mm) height HiddenHelpers models are available - H1115, HDB115, HB115.

WARNING! To reduce the risk of fire, vented dryers must be exhausted OUTDOORS or the equivalent.

NOTE: A louvered door is recommended for closet installations using an ASKO condenser dryer.

Specifications are subject to change without notice. See installation instructions for additional details.